



PAC SERIES

The PAC clamps are professional current clamps capable of measuring alternating and direct currents. The two jaw shapes proposed enable users to clamp cables or small busbars.


Making use of the Hall effect principle, the models in the PAC 10 Series measure up to 400 A AC and 600 A DC, while those in the PAC 20 Series measure up to 1000 A AC and 1400 A DC.

Powered by a battery or a standard external power supply (option) via their micro-USB connector, the PAC clamps are all equipped with a Zero DC reset function and a deactivatable Auto Power Off (APO) function.


The PAC 15 and PAC 25 models are a unique range whose 1 mV/A sensitivity allows "direct" readings on the associated multimeter.

The PAC 16 and PAC 26 models offer a second 10 mV/A calibre which is more sensitive.


The PAC 17 and PAC 27 models, also called "isolated current probes", offer two calibres and are equipped with a coaxial lead and isolated BNC connections for direct connection to an oscilloscope, allowing users to view the waveform and amplitude of the current.

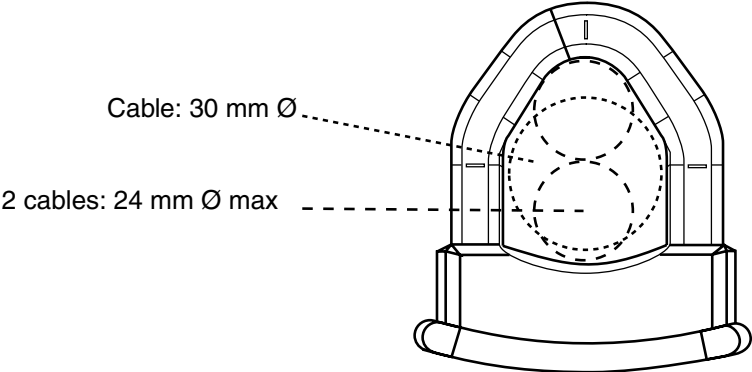

Jaws
PAC15, 16 and 17

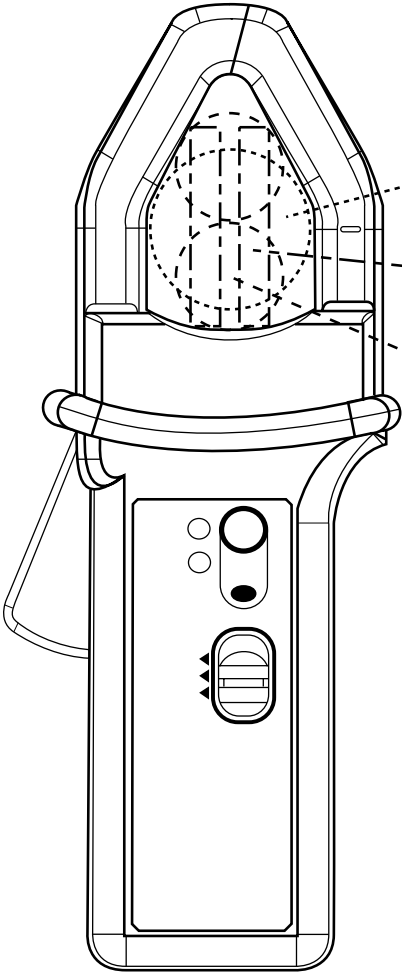

PAC 25, 26 and 27

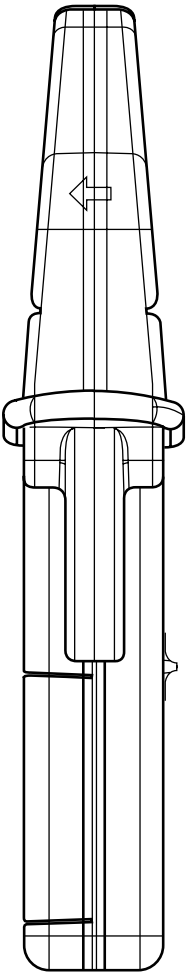

224 mm
(PAC 15, 16 and 17)

236,5 mm
(PAC 25, 26 and 27)

97 mm

44 mm

AC/DC current clamp

PAC15 model

PAC Series

Current	400 A AC 600 A DC
Output	1 mV/A

DESCRIPTION

The PAC15 model accurately measures AC or DC currents by making use of the Hall effect principle. This clamp with mV output is equipped with an automatic DC zero system and a deactivatable Auto Power Off (APO) function. It can be powered by a standard mains power pack via a Micro USB connector.

ELECTRICAL SPECIFICATIONS

- Current calibre:**
0.5 A AC .. 400 A AC (600 A peak) / 0.5 A DC .. 600 A DC
- Output signal:**
1 mV AC+DC / A AC+DC (0.6 V for 600 A)
- Accuracy and phase shift ⁽¹⁾:**

Primary current	0.5 A .. 3 A	3 A .. 100 A	100 A .. 300 A	300 A .. 400 A	400 A .. 500 A (DC only)	500 A .. 600 A (DC only)
Accuracy in % of output signal	≤ 1.5 % + 1 mV	≤ 1.5 % + 1 mV	≤ 2 %	≤ 2 %	≤ 3 %	≤ 4 %
Phase shift ⁽²⁾	Not specified	≤ 2.2°	≤ 2.2°	≤ 1.5°	-	-

- Bandwidth:**
DC .. 30 kHz (-3 dB) (depending on current value)
- Insertion impedance:**
0.01 mΩ @ 400 Hz, 0.12 mΩ @ 1 kHz
- Maximum currents:**
3,000 A DC or 1,000 A AC permanent for a frequency < 1 kHz (limitation proportional to the reciprocal of one third of the frequency beyond that)
- DC zero adjustment:**
Automatic, by 40 - 60 mA increments
- AC noise output:**
≤ 1 mV peak-peak
- Power supply:**
9 V alkaline battery (NEDA 1604A, IEC 6LR61)
5 V DC Micro USB type B
- Battery life:**
50 hours typical
- Consumption:**
10 mA typical (battery)
31 mA typical (µUSB 5 V)
- "ON" LED:**
"Lit" = In operation & battery level OK
"Flashing" = remaining battery life < 4 hours
"Colour = green" = APO ON
"Colour = yellow" = APO OFF
- "OL" LED:**
Overload indication: current measured too high for the calibre used
- Influence of power supply voltage:**
None
- Influence of temperature:**
≤ 3 % variation over the whole operating temperature range
- Influence of relative humidity:**
≤ 0.5% from 10 % to 85 % RH at room temperature

- Influence of an adjacent conductor carrying a 50 Hz alternating current, 23 mm away from the clamp:**
< 10 mA/A
- Influence of a 400 A/m external field @ 50 Hz:**
< 1.3 A
- Influence of the position of a Ø 20 mm conductor in the jaws:**
≤ 0.5 %
- Influence of the frequency ⁽³⁾:**
10 Hz .. 400 Hz: ≤ 1 % of Vs
400 Hz .. 10 kHz: ≤ 3.5 % of Vs
10 kHz .. 30 kHz: see curve
- Common mode rejection:**
> 65 dB A/V @ 50 Hz
- Remanence:**
0 to 50 A DC: 1.2 A typical
0 to 100 A DC: 2.3 A typical
0 to 200 A DC: 3.4 A typical
0 to 400 A DC: 4.8 A typical
0 to 600 A DC: 5.5 A typical
0 to 800 A DC: 5.8 A typical

MECHANICAL SPECIFICATIONS

- Maximum jaw opening:**
31 mm
- Clamping capacity:**
Cables: Ø 30 mm
Ø 24 mm x 2
Busbars: 1 bar 50 x 10 mm
2 bars 31.5 x 10 mm
3 bars 25 x 8 mm
4 bars 25 x 5 mm
- Output:**
1.5 m double-insulated cable with male safety plugs (4 mm)

- Dimensions:**
224 x 97 x 44 mm
- Weight:**
440 g with battery
- Operating temperature:**
-10 °C to +55 °C
- Storage temperature:**
-40 °C to +80 °C
- Max. temperature of clamped conductor (measured):**
+90 °C (may spike at +110 °C)
- Max temperature of jaws:**
+80 °C
- Relative humidity for operation:**
0 to 85 % RH with a linear decrease above 35 °C
- Operating altitude:**
0 to 2,000 m
- Enclosure ingress protection:**
IP 40 (IEC 60529)
- Fall height:**
1 m (IEC 60068-2-32)
- Self-extinguishing capability**
UL94 V1
- Colours:**
Casing: dark grey
Jaws: red



AC/DC current clamp

PAC15 model

PAC Series

SAFETY SPECIFICATIONS

Electrical:


Type A appliance with double or reinforced insulation between the primary, the secondary and the grippable part below the guard as per IEC 61010-1 & IEC 61010-2-032
- 600 V category III, pollution degree 2
- 300 V category IV, pollution degree 2

Electromagnetic compatibility (EMC):


Complies with IEC 61326-1: 2012 (portable instrument)

CURVES


DC linearity

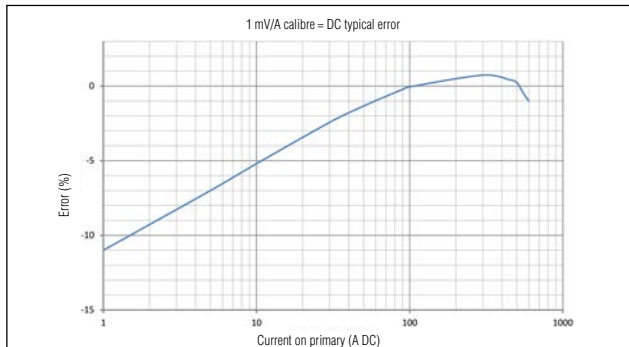


AC linearity

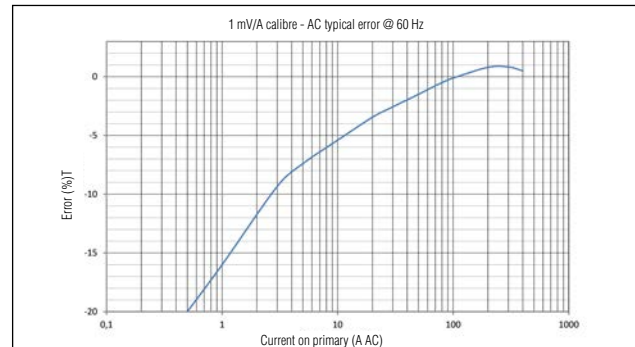


Phase shift

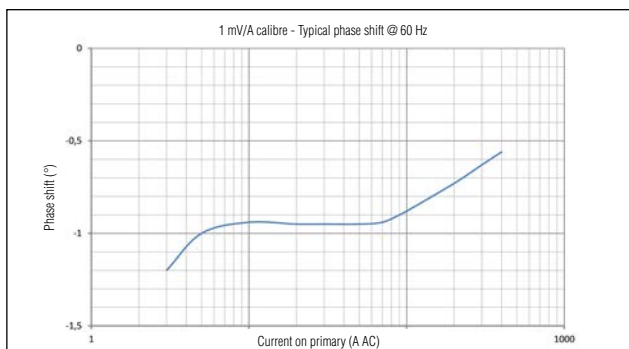


Limitation of measurable current depending on frequency

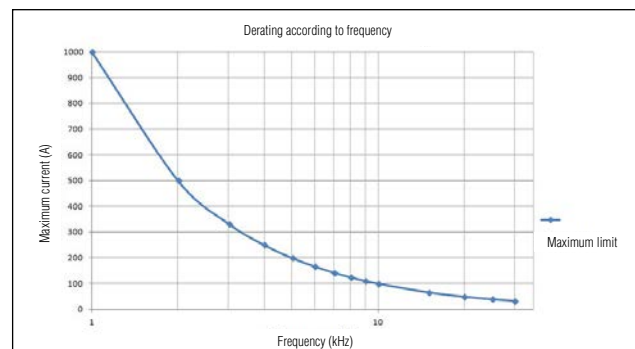

Frequency response

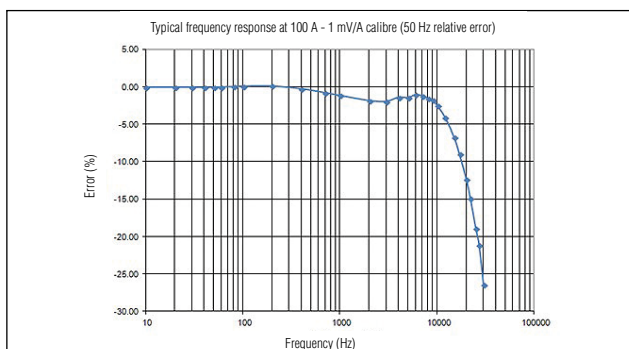

Phase shift according to frequency

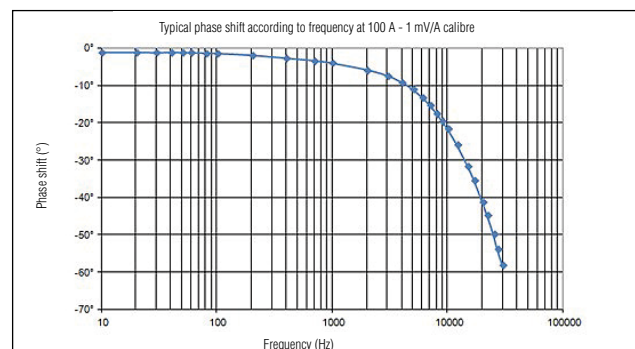

⁽¹⁾ Conditions of reference:

- Temperature & humidity: 23 °C ± 5 °K, 20 % to 75 % HR
- Power supply: by 6 V and 9 V battery or µUSB 5 ± 0.1 V DC,
- Conductor position centred on the clamp locators
- Magnetic field: DC earth field
- Absence of any external alternating magnetic fields.
- Absence of electric fields
- Measurement for a current from DC to 65 Hz sinusoidal
- Impedance of the measuring instrument: > 1 MΩ ≤ 100 pF.

⁽²⁾ Phase shift "absolute value" (unsigned)

⁽³⁾ Outside the reference domain

To order

PAC15 AC/DC current clamp with User's Manual and battery

Reference

P01120115